

WALL



Material : Aluminum die-cast housing.

IP Class : IP67

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Atex Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg7

Led : PHILIPS/OSRAM/CREE

Power Options : 12W/24W/36W/48W/60W/80W




Driver : MOSO/PHILIPS/INVERTRONICS/TRIDONIC

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : Metal Leg

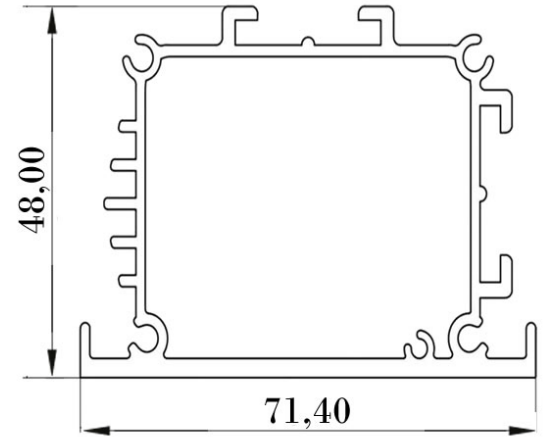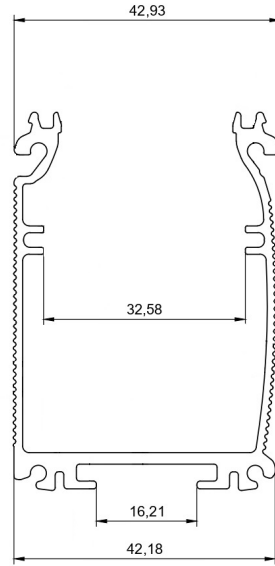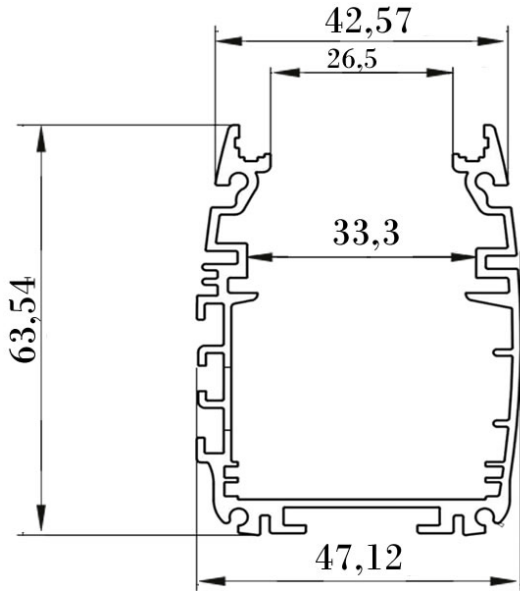

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
WALL-18	12W	180/ 40/ 60	1680	4000/5000/6500/3000/2000	-	CRI>90	0,175 kg
WALL-36	24W	360/ 40/ 60	3360	4000/5000/6500/3000/2000	-	CRI>90	0,350 kg
WALL-48	36W	480/ 40/ 60	5040	4000/5000/6500/3000/2000	-	CRI>90	0,525 kg
WALL-72	48W	720/ 40/ 60	6720	4000/5000/6500/3000/2000	-	CRI>90	0,700 kg
WALL-90	60W	900/ 40/ 60	8400	4000/5000/6500/3000/2000	-	CRI>90	0,875 kg
WALL-120	80W	1200/ 40/ 60	11200	4000/5000/6500/3000/2000	-	tCRI>90	1,175 kg



ZEY LUX