



ZLX - PRJ - 01

IP67



Material : Aluminum body, solid polycarbonate diffuser

IP Class : IP67

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 55^{\circ}\text{C}$

Atex Certificate : IEP25 ATEX 1752X

Labeling : II 2G Ex eb IIC T4 Gb
II 2D Ex tb IIIC T135 °C Db

Sealing Gasket : High temperature and adhesive properties, advanced engineering silicone + NBR O-ring.

Cable Gland Entries : Pg7

Connection Method : Bolted PCB and Driver Box, Separate Compartments, Explosion-Proof Terminals.

Led : NICHIA

Power Options : 100W-150W -180W






Driver : MOSO - PHILIPS

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Antistatic powder coating

Mounting Accessories : Metal mounting bracket

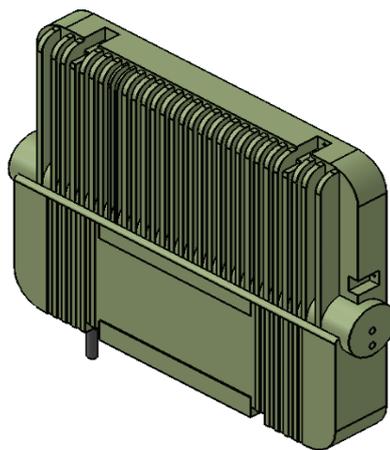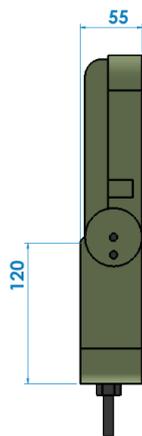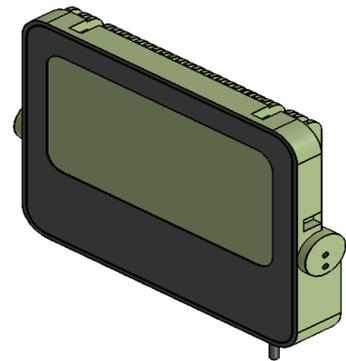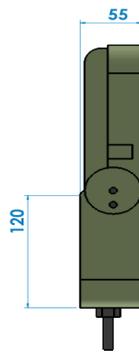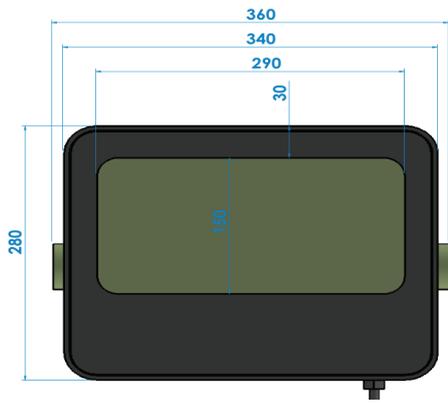

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	CRI	WEIGHT
ZLX-PRJ-01	100 w	340 / 280 / 60	17000 LM	4000/5000/6500	CRI>80	7,4 kg
ZLX-PRJ-01	150 w	340 / 280 / 60	25000 LM	4000/5000/6500	CRI>80	7,4 kg
ZLX-PRJ-01	180 w	340 / 280 / 60	30600 LM	4000/5000/6500	CRI>80	7,4 kg



ZEY LUX