



ZLX - SKL - 01

IP67



Material : Aluminum body, solid polycarbonate diffuser

IP Class : IP67

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 55^{\circ}\text{C}$

Atex Certificate : IEP25 ATEX 1636X

Labeling : II 2G Ex eb IIC T4 Gb
II 2D Ex tb IIIC T135 °C Db

Sealing Gasket : High temperature and adhesive properties, advanced engineering silicone + NBR O-ring.

Cable Gland Entries : Pg7

Led : NICHIA

Power Options : 100W-150W -180W




Driver : MOSO - PHILIPS

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Antistatic powder coating

Mounting Accessories : Metal mounting bracket

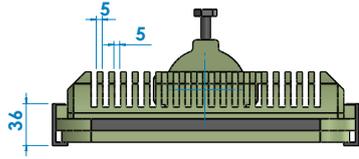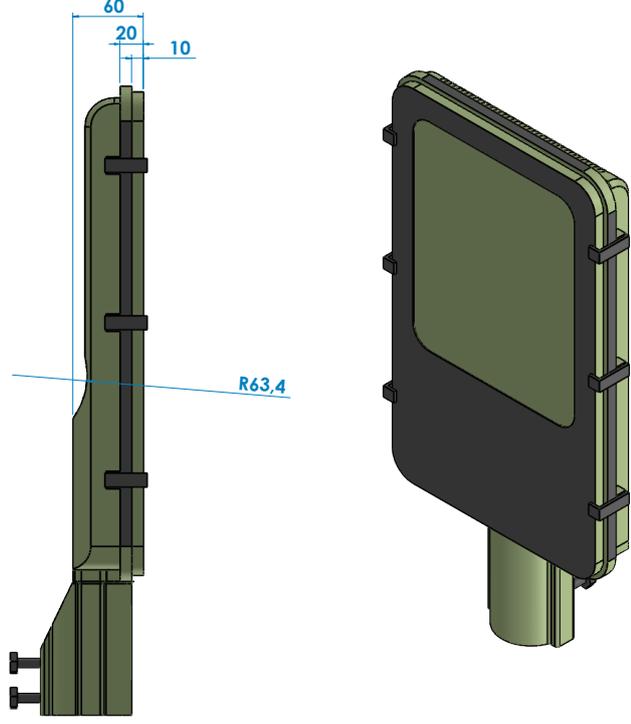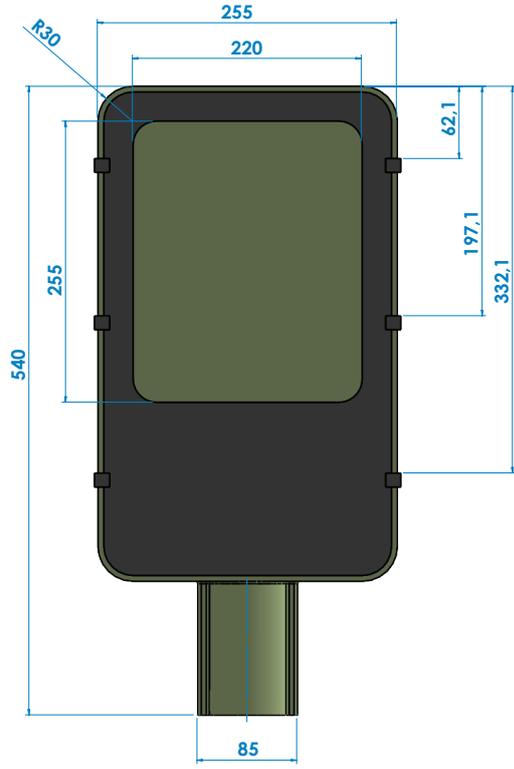

Sıra no:	Tarih:	Adı Soyadı:	İmza:		
Gözen:	S. AKTARER		MALZEME		Adet
Dinay:	19.06.2025				1
Yüzey koruma:					
Parça adı:			Resin no:		
Bilçüler no'su:			ZEYLUX-001		
			Makine no:		
Resin üzerinden ölçü alınmıştır. Sorumlu departmana danışmadan resin üzerinde taahhüt yapılmaz.				SCALE:1:5	

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	CRI	WEIGHT
ZLX-SKL-01	100 w	540 / 255 / 60	17000 LM	4000/5000/6500	CRI>80	8,7 kg
ZLX-SKL-01	150 w	540 / 255 / 60	25000 LM	4000/5000/6500	CRI>80	8,7 kg
ZLX-SKL-01	180 w	540 / 255 / 60	30600 LM	4000/5000/6500	CRI>80	8,7 kg



ZEYLUX