



ZLX-KNP-01

IP67



Material : Aluminum Body, Solid Polycarbonate Diffuser

IP Class : IP67

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 55^{\circ}\text{C}$

Atex Certificate : IEP25 ATEX 1635X

Labeling : II 2G Ex eb IIC T4 Gb
II 2D Ex tb IIIC T135 °C Db

Sealing Gasket : High temperature and adhesive properties, advanced engineering silicone + NBR O-ring.

Cable Gland Entries : Pg7

Connection Method : Bolted PCB and Driver Box, Separate Compartments, Explosion-Proof Terminals.

Led : NICHIA

Power Options : 100W-150W -180W







Driver : MOSO - PHILIPS

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Antistatic powder coating

Mounting Accessories : Metal mounting bracket

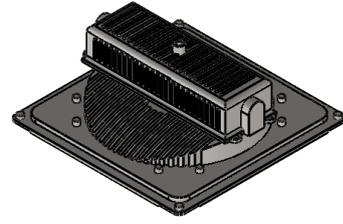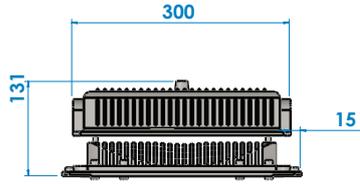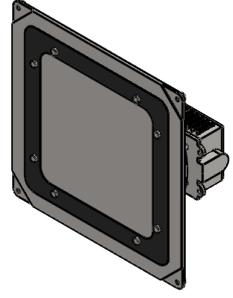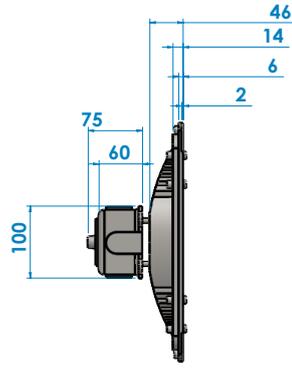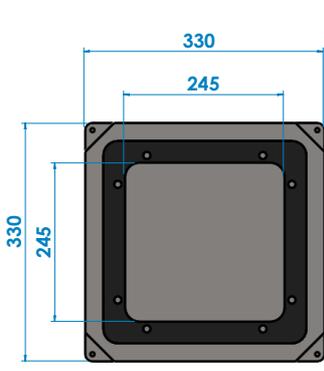

Sıra no:	Tarih:	Adı Soyadı:	İmza:	MALZEME	Adet:	TOLERANS VERİLMEYEN ÖLÇÜLER
Çizen:	19.06.2025	S. AKTARER			1	İÇİN TOLERANS ÇEVRELLİ
Onay:						
yüzey koruma:						
ölçüler mm'dir	Parça adı:	Resim no:	ZEYLUX-002		A3	Ex
		Makine no:			SCALE:1:5	
Resim üzerinden ölçü alınmaz. Sorumlu departmana danışmadan resim üzerinde tadilat yapılmaz.						TA-FR-001/01/23.07.08

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	CRI	WEIGHT
ZLX-KNP-01	100 w	330 / 330 / 92	17000 LM	4000/5000/6500	CRI>80	8,7 kg
ZLX-KNP-01	150 w	330 / 330 / 92	25000 LM	4000/5000/6500	CRI>80	8,7 kg
ZLX-KNP-01	180 w	330 / 330 / 92	30600 LM	4000/5000/6500	CRI>80	8,7 kg



ZEYLUX