

ALC-GOM-1



Material: Aluminum die-cast housing

IP Class : IP44

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg6

Led : LEDVANCE/TYF

Power Options : 20W/30W






Driver : LIFUT/EAGLERISE/OSRAM ELEMENT

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : Metal Legs

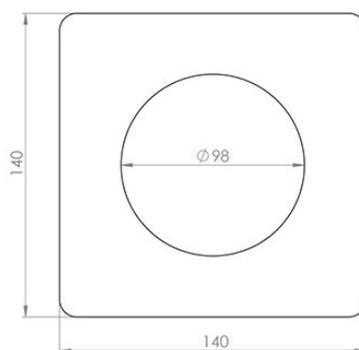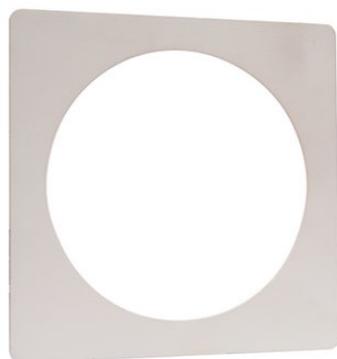

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
ALC-GOM	20W	140 / 140 / 40	2800	4000/5000/6500	119MM	CRI>95	0,5 kg
ALC-GOM	30W	140 / 140 / 40	4200	4000/5000/6500	119MM	CRI>95	0,5 kg



ZEY LUX