

Material: Aluminum die-cast housing

IP Class : IP44

Suitable Operating Ambient Temperature :  $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg7

Led : LEDVANCE/TYF

Power Options : 15W






Driver : LIFUT/EAGLERISE/OSRAM ELEMENT

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : Metal Legs

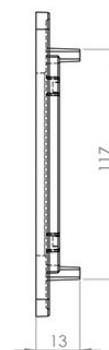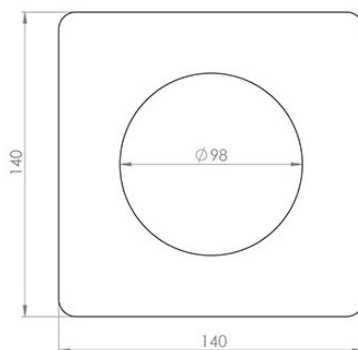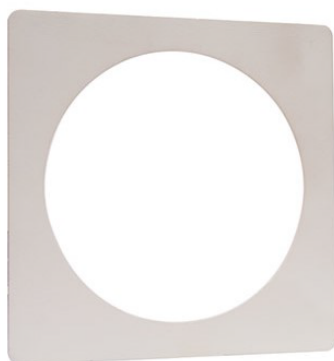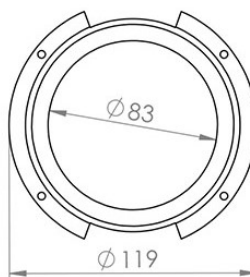

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
ARCHITECT	20W	85/ 70	2000	4000/5000/6500	75MM	CRI>95	0,280 kg



**ZEY LUX**