

CAT-150

Material: Aluminum die-cast housing

IP Class : IP66

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg7

Led : OSRAM

Power Options : 100W-150W



Driver : MOSO/INVERTRONICS/PHILIPS

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : Metal Legs

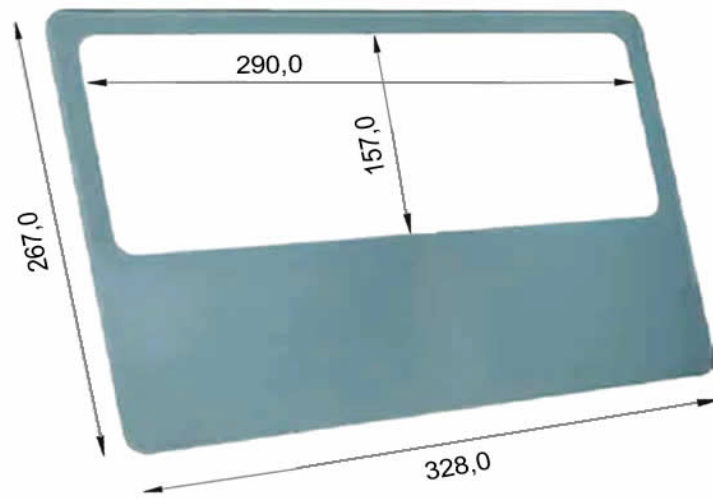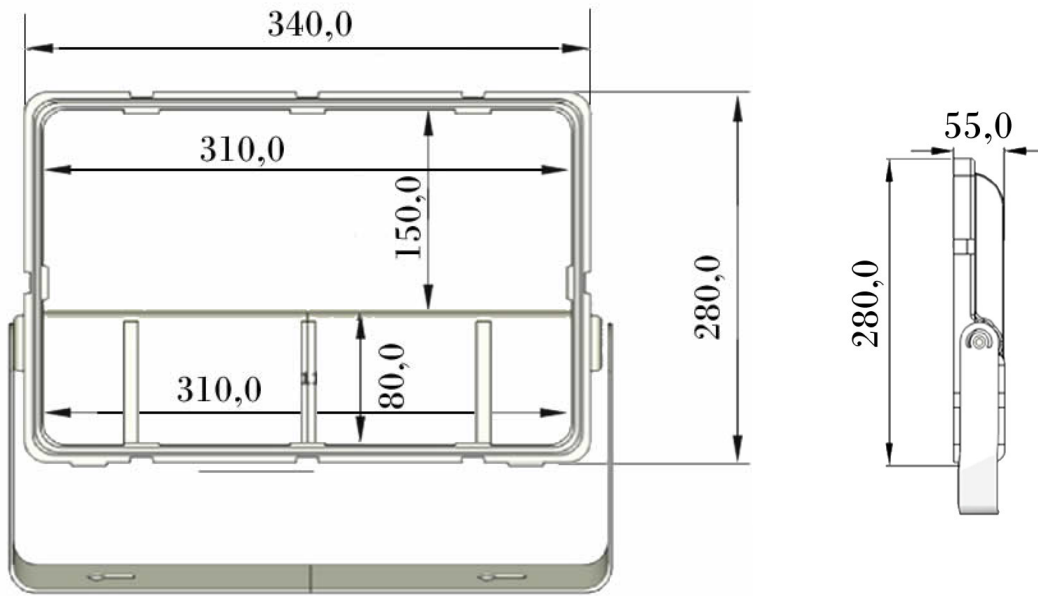

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
CAT150	100W	280/ 340 / 60	14000	4000/5000/6500	-	CRI>80	4,6 kg
CAT150	150W	280/ 340 / 60	21000	4000/5000/6500	-	CRI>80	4,6 kg