

## GORCHILI



Material: Aluminum die-cast housing

IP Class : IP67

Suitable Operating Ambient Temperature :  $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg7

Led : OSRAM/PHILIPS

Power Options : 200W/250W/300W



Driver : MOSO/INVERTRONICS/PHILIPS

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : Metal Legs

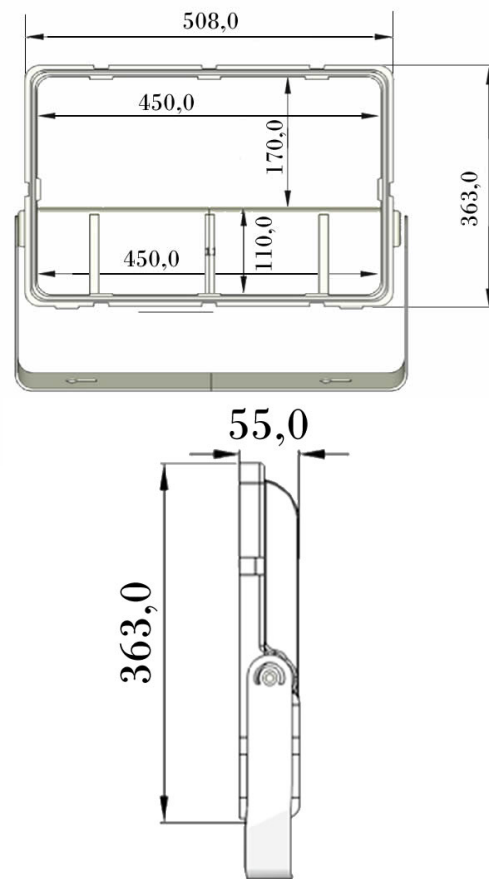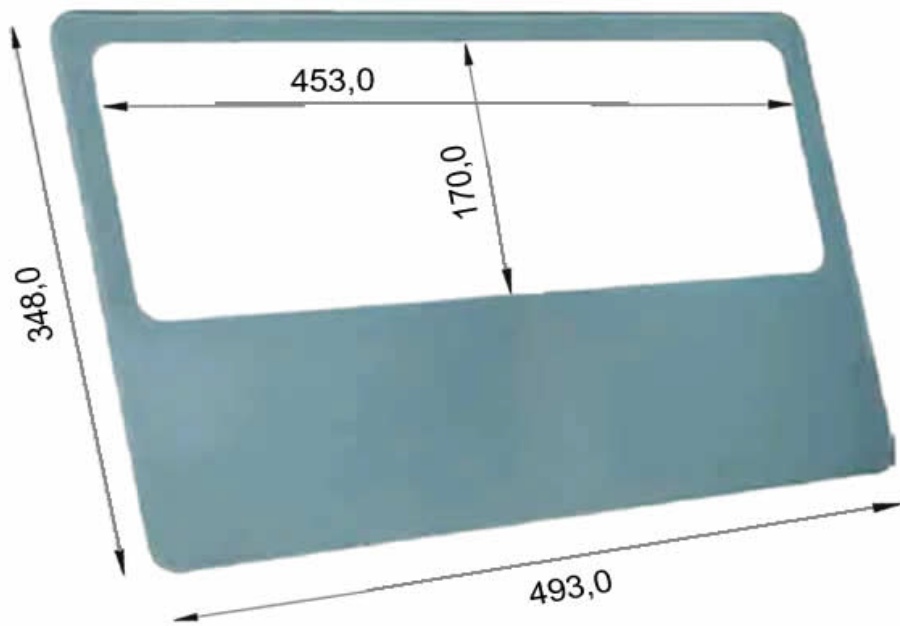

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
GORCHILI	200W	350/ 500/ 60	28000	4000/5000/6500	-	CRI>90	6,5 kg
GORCHILI	250W	350/ 500/ 60	35000	4000/5000/6500	-	CRI>90	6,5 kg
GORCHILI	300W	350/ 500/ 60	42000	4000/5000/6500	-	CRI>90	6,5 kg



**ZEY LUX**