

MATOS



Material : Aluminum die-cast housing.

IP Class : IP44

Suitable Operating Ambient Temperature : $-20^{\circ}\text{C} < t_a < + 45^{\circ}\text{C}$

Atex Certificate : CE -EN-IEC 60598-1-EN IEC 60598-2-1

Cable Gland Entries : Pg7

Led : LEDVANCE/TYF/PHILIPS/NICHIA

Power Options : 24W/40W/60W/80W


Driver : OSRAM/PHILIPS/LIFUT/EAGLERISE

Suitable Operating Voltage Range : 220-240V

Frequency Range : 50-60 Hz

Paint : Electrostatic Powder Coating

Mounting Accessories : STEEL WIRE/SCREW DOWEL

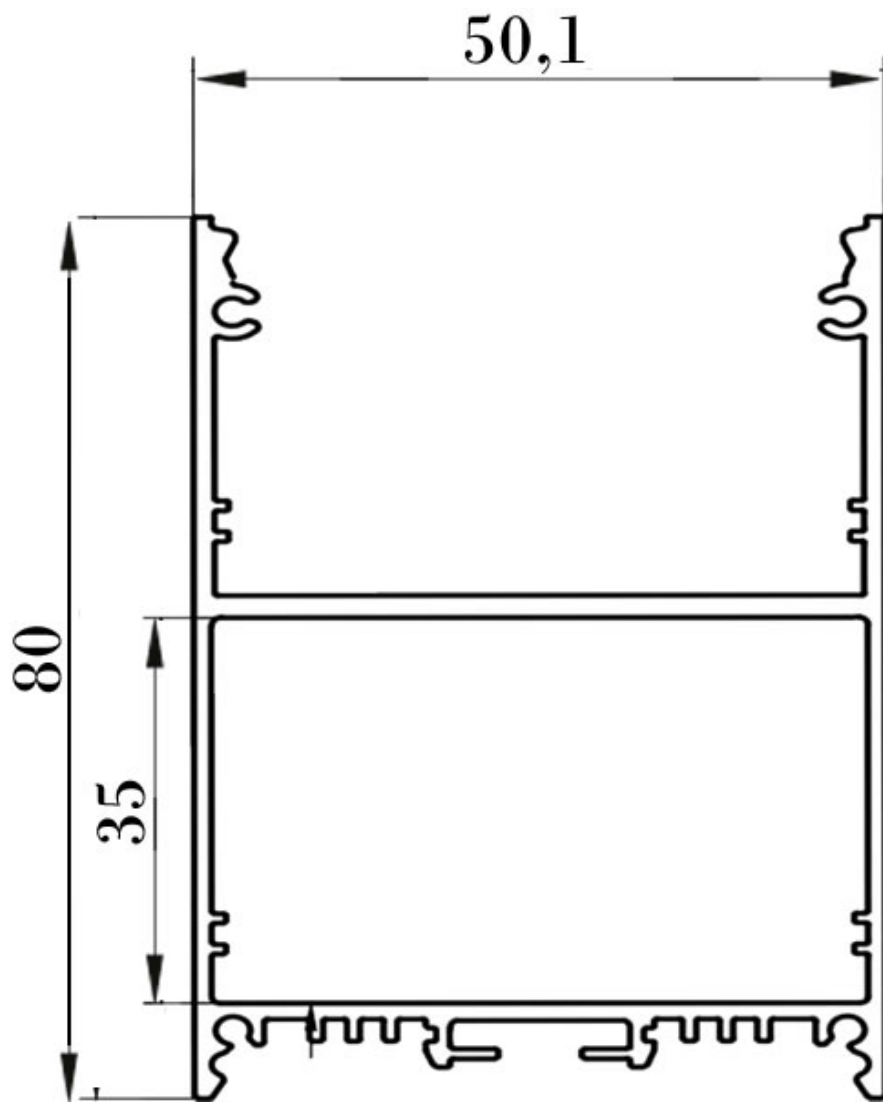

CODE	POWER	DIMENSIONS	LUMEN	KELVIN	MOUNTING CUT-OUT SIZE	CRI	WEIGHT
MATOS	24W	80/600/50	3360	4000/5000/3000	-	CRI>90	0,6 kg
MATOS	40W	80/1000/50	5600	4000/5000/3000	-	CRI>90	1 kg
MATOS	60W	80/1500/50	8400	4000/5000/3000	-	CRI>90	1,5 kg
MATOS	80W	80/2000/50	11200	4000/5000/3000	-	CRI>90	3,2 kg

ZEY LUX